


WoodCoat-S

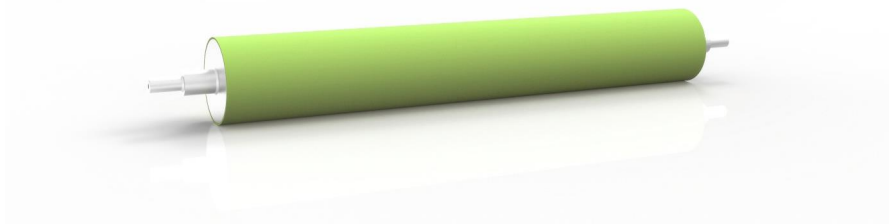

Cover Type:	Rubber	
Possible applications:	<p>Production of wood, wood board and wood laminate :</p> <ul style="list-style-type: none">- varnishing rollers, UV lacquering, decorative coating, impregnation- glue applicators, water or solvent based- catalyst and primer application <p>Possibility to foresee microgrooves up to 80 grooves/inch</p> <p>Not recommended for oiling of wood</p>	
Hardness Range:	35, 45, 55, 65, 75 Shore A	
Available Colours:	green	
Recommended Cover Thickness:	min. 12 mm - max. 25 mm	
Temperature resistance:	Dry:	continuous 120°C / peak 130°C
	Wet:	continuous 80°C / peak 90°C
Properties and advantages:	<p>Good physical properties</p> <p>Excellent resistance to polar solvents (MEC, acetates, alcohols...)</p> <p>Very good surface wetting and transfer properties</p> <p>High purity and homogeneity</p> <p>Easy to grind and to groove</p>	
Chemical resistance:	Acid solutions:	Excellent
	Alkaline solutions:	Excellent
	Hot water and steam:	Very good
	Ozone:	Excellent
	Oil and grease:	Not suited
	Aromatic solvents (toluene, benzene,...):	Not suited
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Excellent
	Alcohols (ethanol, IPA,...):	Excellent
	Ageing resistance:	Exceptional
Recommended cleaning products:	(Warm) water, soap, detergent, acid/alkaline cleaners, polar solvents : MEK, alcohol, acetate...	