


WoodCoat-S

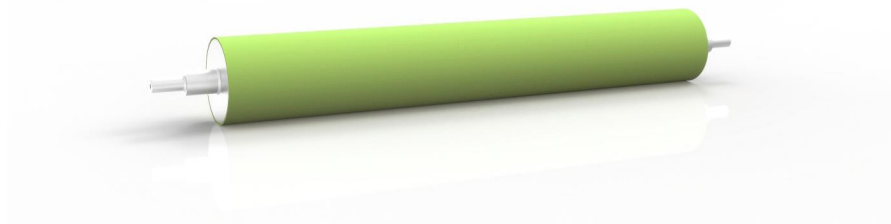

Cover Type:	Rubber
Possible applications:	Production of wood, wood board and wood laminate : - varnishing rollers, UV lacquering, decorative coating, impregnation - glue applicators, water or solvent based - catalyst and primer application Possibility to foresee microgrooves up to 80 grooves/inch Not recommended for oiling of wood
Hardness Range:	35, 45, 55, 65, 75 Shore A
Available Colours:	green
Recommended Cover Thickness:	min. 12 mm - max. 25 mm
Temperature resistance:	Dry: continuous 120°C / peak 130°C Wet: continuous 80°C / peak 90°C
Properties and advantages:	Good physical properties Excellent resistance to polar solvents (MEC, acetates, alcohols...) Very good surface wetting and transfer properties High purity and homogeneity Easy to grind and to groove
Chemical resistance:	Acid solutions: Excellent Alkaline solutions: Excellent Hot water and steam: Very good Ozone: Excellent Oil and grease: Not suited Aromatic solvents (toluene, benzene,...): Not suited Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Excellent Alcohols (ethanol, IPA,...): Excellent Ageing resistance: Exceptional
Recommended cleaning products:	(Warm) water, soap, detergent, acid/alkaline cleaners, polar solvents : MEK, alcohol, acetate...