


WoodBond-XP

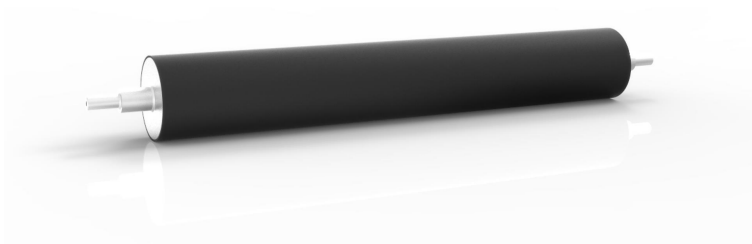

Cover Type:	Rubber
Possible applications:	Production of wood, wood board and wood laminate : - applicator and transfer rollers for cold glue, water or formaldehyde based - applicator rollers for hardeners and catalysts
Hardness Range:	60, 65, 70, 80 Shore A
Recommended Cover Thickness:	min. 10 mm - max. 20 mm
Temperature resistance:	Dry: continuous 120°C / peak 130°C Wet: continuous 80°C / peak 90°C
Properties and advantages:	Good surface wetting and transfer properties Excellent physical properties and lifetime High purity and homogeneity Easy to grind and to groove
Chemical resistance:	Acid solutions: Excellent Alkaline solutions: Excellent Hot water and steam: Excellent Ozone: Excellent Oil and grease: Moderate Aromatic solvents (toluene, benzene,...): Moderate Chlorinated solvents: Moderate Polar solvents (MEC, ether, acetate,...): Moderate Alcohols (ethanol, IPA,...): Very good Ageing resistance: Excellent
Recommended cleaning products:	(Hot) water, acid and alkaline cleaners, soap and detergents, alcohol based cleaners