


HanneStar-CR

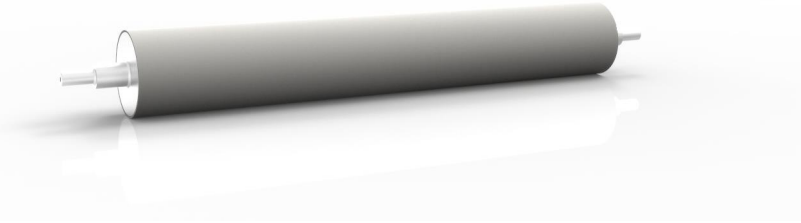

Cover Type:	Special rubber
Possible applications:	Metal strip production and conversion : - Bridle, steer and deflector rolls, pinch rollers - Rollers for metal strip transport where high grip and friction coefficient is needed, transport of humid or oiled strip Textile industry, (Card)board industry, Paper conversion : transport rollers and wheels, tension rollers
Hardness Range:	75 Shore A
Available Colours:	grey
Recommended Cover Thickness:	min. 10 mm - max. 20 mm
Temperature resistance:	Dry: continuous 90°C / peak 100°C Wet: continuous 70°C / peak 80°C
Properties and advantages:	Special rubber with filler increasing the surface roughness after grinding Improved grip and friction coefficient Especially efficient on wet and oily metal strip
Specific characteristics:	Permanent surface roughness
Chemical resistance:	Acid solutions: Moderate Alkaline solutions: Good Hot water and steam: Not suited Ozone: Moderate Oil and grease: Excellent Aromatic solvents (toluene, benzene,...): Moderate Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited Alcohols (ethanol, IPA,...): Very good
Recommended cleaning products:	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, turpentine, white spirit