


HanneStar-CR

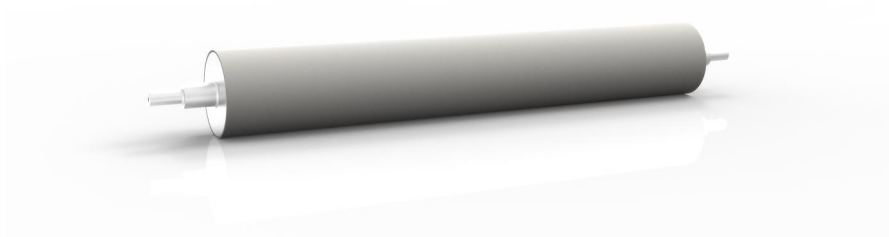

Cover Type:	Special rubber	
Possible applications:	<p>Metal strip production and conversion :</p> <ul style="list-style-type: none">- Bridle, steer and deflector rolls, pinch rollers- Rollers for metal strip transport where high grip and friction coefficient is needed, transport of humid or oiled strip <p>Textile industry, (Card)board industry, Paper conversion : transport rollers and wheels, tension rollers</p>	
Hardness Range:	75 Shore A	
Available Colours:	grey	
Recommended Cover Thickness:	min. 10 mm - max. 20 mm	
Temperature resistance:	Dry:	continuous 90°C / peak 100°C
	Wet:	continuous 70°C / peak 80°C
Properties and advantages:	<p>Special rubber with filler increasing the surface roughness after grinding</p> <p>Improved grip and friction coefficient</p> <p>Especially efficient on wet and oily metal strip</p>	
Specific characteristics:	Permanent surface roughness	
Chemical resistance:	Acid solutions:	Moderate
	Alkaline solutions:	Good
	Hot water and steam:	Not suited
	Ozone:	Moderate
	Oil and grease:	Excellent
	Aromatic solvents (toluene, benzene,...):	Moderate
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
	Alcohols (ethanol, IPA,...):	Very good
Recommended cleaning products:	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, terpentine, white spirit	