


Accuthane-D

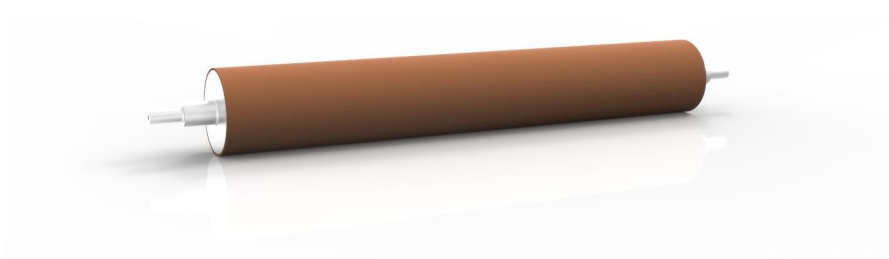

Cover Type:	Polyurethane	
Possible applications:	Steel and stainless steel strip processing: recommended quality for horizontal looper rollers and strip support rollers on pickling and tandem lines	
Hardness Range:	90, 95 Shore A	
Available Colours:	brown	
Recommended Cover Thickness:	min. 7 mm - max. 15 mm	
Temperature resistance:	Dry:	continuous 90°C / peak 100°C
	Wet:	continuous 50°C / peak 60°C
Properties and advantages:	<p>Double layer/double colour covering with a bright yellow base layer (4 mm), that can visually be used as abrasion witness This covering solutions allow to verify the abrasion on the roller cover in a safe way and from a distance</p> <p>Outstanding abrasion resistance</p> <p>Very good resistance to tear and cutting</p> <p>Specifically suited for the covering of large numbers with short delivery time</p>	
Chemical resistance:	Acid solutions:	Moderate
	Alkaline solutions:	Moderate
	Hot water and steam:	Not suited
	Ozone:	Very good
	Oil and grease:	Excellent
	Aromatic solvents (toluene, benzene,...):	Not suited
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
	Alcohols (ethanol, IPA,...):	Good
Recommended cleaning products:	(Tepid) water, soap, industrial cleaners, cleaning fuel, terpentine, with limited use : alcohol	