


HannePearl

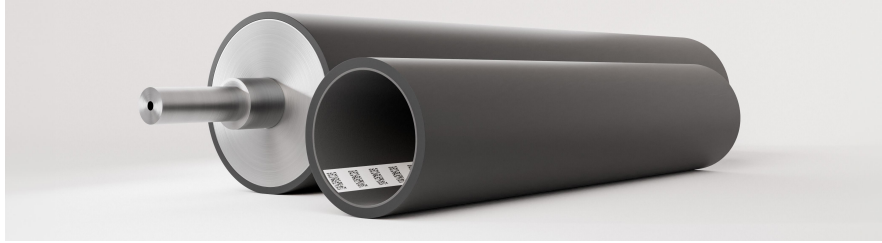

Cover Type:	Special polyurethane
Possible applications:	Rotogravure Printing for Cardboard packaging with ESA. Compatible with all ESA Systems.
Hardness Range:	90 Shore A
Recommended Cover Thickness:	min. 12 mm - max. 20 mm
Temperature resistance:	Dry: continuous 60°C / peak 80°C Wet: continuous 40°C / peak 50°C
Properties and advantages:	Very high load resistance, very good dynamical properties with low heat build-up. Remarkable abrasion, cut and tear resistance. High resistance against printing solvents. Compatible with all ESA systems.
Specific characteristics:	Semi-conductor
Recommended cleaning products:	Water, soap & detergents, alcohol based cleaners
Remark:	Very high load resistance, very good dynamical properties with low heat build-up. Remarkable abrasion, cut and tear resistance. High resistance against printing solvents. Compatible with all ESA systems.