


# MultiCoat-XPE

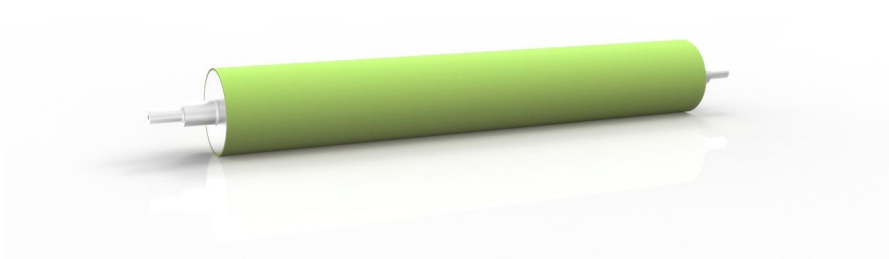

<b>Cover Type:</b>	Special rubber
<b>Possible applications:</b>	Metal industry - production of steel, stainless steel, aluminium and non-ferrous strip Applicator rollers for chemical coating (passivation, pre- and post-treatment, water-based coating)
<b>Hardness Range:</b>	50 Shore A
<b>Available Colours:</b>	green
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 30 mm
<b>Temperature resistance:</b>	Dry: continuous 125°C / peak 140°C Wet: continuous 75°C / peak 85°C
<b>Properties and advantages:</b>	Very good abrasion, tear and cut-in resistance High surface energy, very good transfer properties and wettability High purity and homogeneity Very good resistance to water based and acid based coatings Moderate resistance to solvents
<b>Chemical resistance:</b>	Acid solutions: Very good Alkaline solutions: Good Hot water and steam: Good Ozone: Excellent Oil and grease: Moderate Aromatic solvents (toluene, benzene,...): Moderate Chlorinated solvents: Moderate Polar solvents (MEC, ether, acetate,...): Moderate Alcohols (ethanol, IPA,...): Very good
<b>Recommended cleaning products:</b>	(Warm) water, soap, industrial cleaners and detergents, alcohol, (diluted) acid & alkaline cleaners