


Hannethane-XM

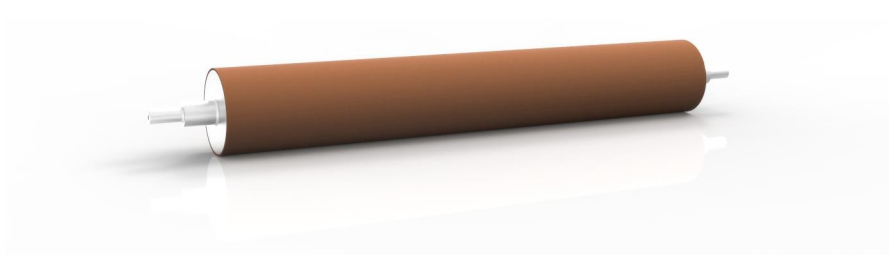

Cover Type:	Polyurethane	
Possible applications:	Metals industry : snubber and pinch rollers, hold-down and pressure rollers, tension, steering and traction rolls, pressure rings - squeegee rollers in water rinse/quench and in some chemical environments	
Hardness Range:	70, 75, 80, 90, 95 Shore A	
Available Colours:	brown, brown	
Recommended Cover Thickness:	min. 10 mm - max. 25 mm	
Temperature resistance:	Dry: Wet:	continuous 80°C / peak 95°C continuous 50°C / peak 60°C
Properties and advantages:	Very high abrasion, tear and cut-in resistance Resistant to high load applications, excellent impact resistance Very good resistance to mineral oil Good hydrolysis resistance up to 60 °C, fair resistance to diluted acids up to 40 °C and to alkaline solutions up to 60 °C	
Chemical resistance:	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Aromatic solvents (toluene, benzene,...): Chlorinated solvents: Polar solvents (MEC, ether, acetate,...): Alcohols (ethanol, IPA,...):	Moderate Good Not suited Good Very good Not suited Not suited Not suited Good
Recommended cleaning products:	(Tepid) water, soap, industrial cleaners, cleaning fuel, terpentine, alcohol with limited use	