


# Hannethane-XM

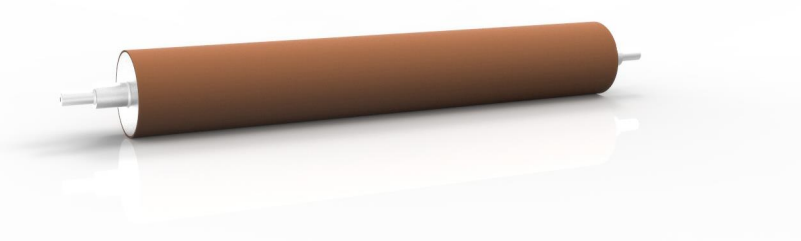

<b>Cover Type:</b>	Polyurethane	
<b>Possible applications:</b>	Metals industry : snubber and pinch rollers, hold-down and pressure rollers, tension, steering and traction rolls, pressure rings - squeegee rollers in water rinse/quench and in some chemical environments	
<b>Hardness Range:</b>	70, 75, 80, 90, 95 Shore A	
<b>Available Colours:</b>	brown, brown	
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 25 mm	
<b>Temperature resistance:</b>	Dry:	continuous 80°C / peak 95°C
	Wet:	continuous 50°C / peak 60°C
<b>Properties and advantages:</b>	Very high abrasion, tear and cut-in resistance Resistant to high load applications, excellent impact resistance Very good resistance to mineral oil Good hydrolysis resistance up to 60 °C, fair resistance to diluted acids up to 40 °C and to alkaline solutions up to 60 °C	
<b>Chemical resistance:</b>	Acid solutions:	Moderate
	Alkaline solutions:	Good
	Hot water and steam:	Not suited
	Ozone:	Good
	Oil and grease:	Very good
	Aromatic solvents (toluene, benzene,...):	Not suited
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
	Alcohols (ethanol, IPA,...):	Good
<b>Recommended cleaning products:</b>	(Tepid) water, soap, industrial cleaners, cleaning fuel, turpentine, alcohol with limited use	