


Hannethane-XM

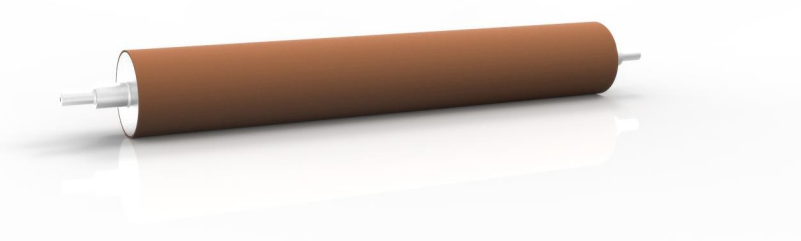

Cover Type:	Polyurethane	
Possible applications:	Metals industry : snubber and pinch rollers, hold-down and pressure rollers, tension, steering and traction rolls, pressure rings - squeegee rollers in water rinse/quench and in some chemical environments	
Hardness Range:	70, 75, 80, 90, 95 Shore A	
Available Colours:	brown, brown	
Recommended Cover Thickness:	min. 10 mm - max. 25 mm	
Temperature resistance:	Dry:	continuous 80°C / peak 95°C
	Wet:	continuous 50°C / peak 60°C
Properties and advantages:	Very high abrasion, tear and cut-in resistance Resistant to high load applications, excellent impact resistance Very good resistance to mineral oil Good hydrolysis resistance up to 60 °C, fair resistance to diluted acids up to 40 °C and to alkaline solutions up to 60 °C	
Chemical resistance:	Acid solutions:	Moderate
	Alkaline solutions:	Good
	Hot water and steam:	Not suited
	Ozone:	Good
	Oil and grease:	Very good
	Aromatic solvents (toluene, benzene,...):	Not suited
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
	Alcohols (ethanol, IPA,...):	Good
Recommended cleaning products:	(Tepid) water, soap, industrial cleaners, cleaning fuel, turpentine, alcohol with limited use	