


# MultiPrint-SP

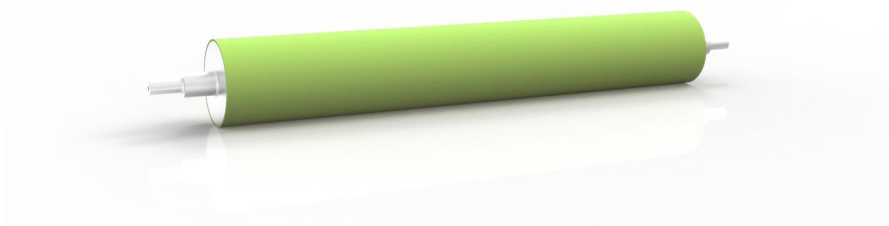

<b>Cover Type:</b>	Rubber	
<b>Possible applications:</b>	Inking rollers Specially adapted to exclusive use of UV inks Good resistance to solvents and cleaning products for UV inks	
<b>Hardness Range:</b>	35, 45, 55, 65 Shore A	
<b>Available Colours:</b>	green	
<b>Recommended Cover Thickness:</b>	min. 15 mm - max. 30 mm	
<b>Temperature resistance:</b>	Dry:	continuous 90°C / peak 125°C
	Wet:	continuous 80°C / peak 110°C
<b>Properties and advantages:</b>	Good physical properties, good abrasion resistance Good resistance to polar solvents (MEK, acetates, alcohols ...) Very good wettability - high surface energy High purity and homogeneity Easy to grind	
<b>Chemical resistance:</b>	Acid solutions:	Very good
	Alkaline solutions:	Very good
	Hot water and steam:	Very good
	Ozone:	Excellent
	Oil and grease:	Not suited
	Aromatic solvents (toluene, benzene,...):	Not suited
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Excellent
<b>Recommended cleaning products:</b>	(Hot) water, soap, acid and alkaline cleaning solutions, polar solvents, alcohol	