


HANNESHRIK[®]

rubber belts

The rubber sanforizing belt to shrink all your fabrics.
Now with new reinforced inner face.

Whether used for delicate fabrics demanding a flawless belt finish or for heavy denims and elastic cords necessitating optimal and consistent shrinkage, Hanneshrink[®] is renowned for its irreplaceable quality.

Our seasoned experts in rubber applications, coupled with natural rubber sourced from certified plantations, alongside our extensive manufacturing expertise, guarantee unwavering product excellence.

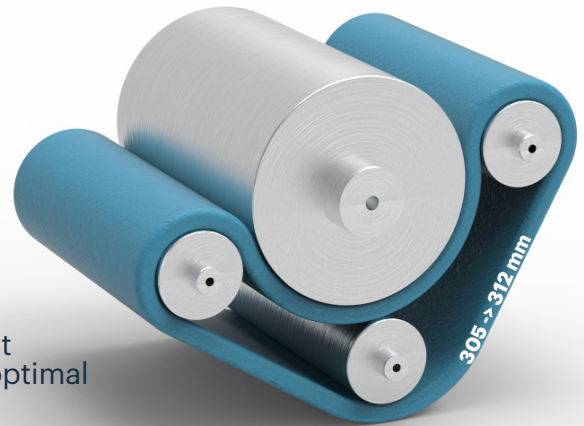

Key Performances

- Natural rubber formula: superior resistance to tearing, cracking, elongation, abrasion, heat and chemicals
- Multilayer structure
- Homogenous belt structure for constant shrink
- Longer lifetime between grindings
- Seamless, can be installed in both directions
- Improved mechanical resistance of the inner face (lower risk of abrasion and cracks)



Technical Specs

Sanfor:

- Internal circumference: 3962 mm
- Standard thickness*: 67 mm
- Tailored width: 1000 to 3600 mm
- Hardness of outer face: 38 Shore A

Ribbon and Mini:

- Internal circumference: 2400 mm
- Standard thickness*: 60 mm
- Tailored width: 480 to 1800 mm
- Hardness of outer face: 40 Shore A

Comfit:

- Internal circumference: 3962 mm
- Standard thickness*: 50 to 55 mm
- Tailored width: 1800 to 2000 mm
- Hardness of outer face: 38 Shore A

**other thicknesses on demand*



Included

- A Manual for installation, use and maintenance
- A Repair kit in case of cracks and damages of the top surface
- Wax candles for the outer face sticking
- Worldwide technical support team that helps the customer in all questions related to the belt and the processed fabric