


Flexolys® Foam

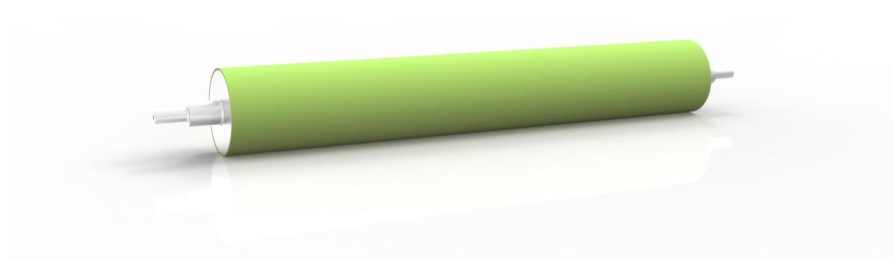

Cover Type:	Polyurethane foam	
Possible applications:	Winder Drum roll, Winder Rider roll Recommended for coated paper winding (especially Glassine, Silicone and SC paper grades)	
Hardness Range:	37 Shore A	
Available Colours:	green	
Recommended Cover Thickness:	Standard 15 mm	max. 25 mm
Temperature resistance:	Dry:	continuous 70°C / peak 90°C
Properties and advantages:	Outstanding vibration absorption Reduced paper waste during winding Significant lifetime increase compared to existing solutions Resistant to cut propagation Homogeneous winding tension	
Chemical resistance:	Acid solutions:	Not suited
	Alkaline solutions:	Not suited
	Hot water and steam:	Not suited
	Ozone:	Good
	Oil and grease:	Very good
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
Recommended cleaning products:	- Good resistance to standard chemicals normally used in paper	
Remark:	- Reference list available on demand	