


# Hanneresist-GNN75

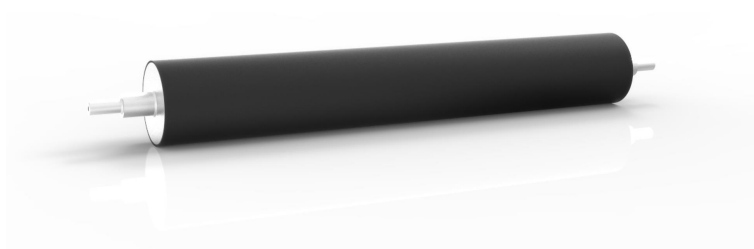

<b>Cover Type:</b>	Special polyurethane	
<b>Possible applications:</b>	Rotogravure Printing ESA Compatible with all Eltex GNN75 ESA Systems	
<b>Hardness Range:</b>	89 Shore A	
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 20 mm	
<b>Temperature resistance:</b>	Dry: Wet:	continuous 80°C / peak 90°C continuous 30°C / peak 40°C
<b>Properties and advantages:</b>	Very high load resistance, very good dynamical properties with low heat build-up. Remarkable abrasion, cut and tear resistance. High resistance against printing solvents. Compatible with all ESA GNN75 Eltex System.	
<b>Specific characteristics:</b>	Semi-conductor	
<b>Recommended cleaning products:</b>	Water, soap & detergents, alcohol based cleaners	