


# BupFoil-B

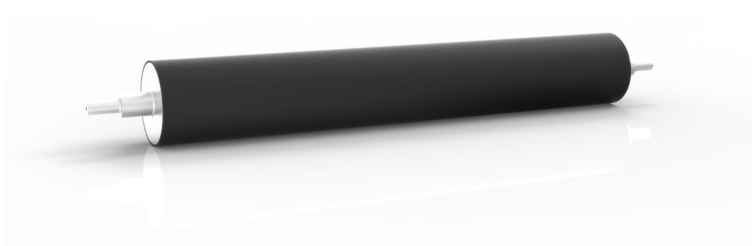

<b>Cover Type:</b>	Rubber	
<b>Possible applications:</b>	Nip and pressure rollers for cold laminating of plastic film Counterpress rollers for laminating of paper, board and aluminium on cast plastic film	
<b>Hardness Range:</b>	92, 93, 95, 97 Shore A	
<b>Available Colours:</b>	black	
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 20 mm	
<b>Temperature resistance:</b>	Dry: Wet:	continuous 100°C / peak 110°C continuous 70°C / peak 80°C
<b>Properties and advantages:</b>	Very good physical properties, good tear and cut-in resistance  Excellent resistance to mineral, vegetable and synthetic oils. Very good resistance to kerosine and fuels  Excellent load resistance, very stable nip behaviour even under high pressure  Good contact behaviour with different web types and with plastic film	
<b>Chemical resistance:</b>	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Aromatic solvents (toluene, benzene,...): Chlorinated solvents: Polar solvents (MEC, ether, acetate,...):	Good Good Good Very good Excellent Moderate Not suited Not suited
<b>Recommended cleaning products:</b>	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, terpentine, white spirit	