


Press Plast Gold

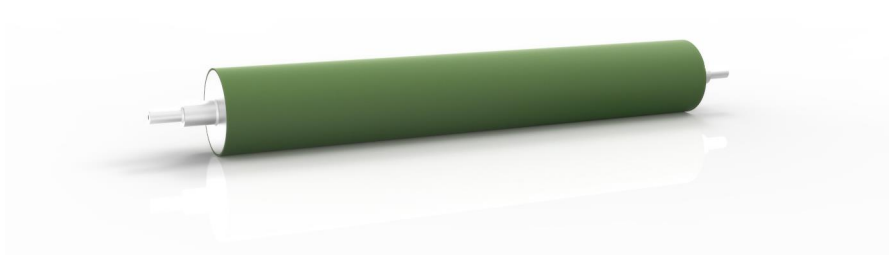

Cover Type:	Special rubber	
Possible applications:	Tissue paper converting : marrying laminator roller - recommended in case of multi-plyes embossing	
Hardness Range:	72 Shore D	
Recommended Cover Thickness:	min. 10 mm - max. 15 mm	
Temperature resistance:	Dry:	continuous 110°C / peak 125°C
Properties and advantages:	<p>Guarantees perfect assembly of the plies even if they are numerous, preserving product softness, thanks to the narrow nip and increased specific pressure</p> <p>No back-side effect (re-embossing of the inner ply)</p> <p>Excellent resistance to mechanical stress</p> <p>Very good abrasion resistance and lifetime</p> <p>Increased release properties</p>	
Chemical resistance:	Acid solutions:	Very good
	Alkaline solutions:	Good
	Hot water and steam:	Good
	Ozone:	Very good
	Oil and grease:	Good
	Aromatic solvents (toluene, benzene,...):	Not suited
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
	Alcohols (ethanol, IPA,...):	Very good
	Ageing resistance:	Very good
Recommended cleaning products:	(Warm) water, soap, industrial cleaners and detergents, alcohol, (diluted) acid cleaners	